

Smart IoT Box

WI-IOTBOXMINI



Overview

Wi-Tek's Smart IoT Box is an all-weather outdoor electrical equipment protection box designed for outdoor use in the outdoor environment. It has waterproof, dustproof, heat dissipation, anti-ultraviolet, anti-theft, anti-rust, acid and alkali corrosion, anti-electromagnetic interference (anti-lightning EMP), modular structure design in the box, electrical equipment can be installed vertically or horizontally according to the situation.

Fit outdoor CCTV, WLAN, Wi-Fi Coverage, Industrial IoT Application requirements with Wi-Tek industrial switch, 4G LTE router, outdoor wireless transmitter, solar powered PoE switch, IoT M2M gateway, and mesh AP, greatly decrease your project deployment cost by flexible modular installation.

Features

IP65 Ingress Protection

Outstanding dustproof and waterproof design protects the equipment inside the box in the outdoor.

Rugged construction, IK10 Inverse Kinematics

A seamless welding box body can withstand huge external forces without deformation.

Advanced Outdoor Protection

Made of aluminum alloy or 304 stainless steel connecting mounting parts, Electrostatic powder spraying main body, can anti-aging, gas corrosion resistance, UV damage resistance, acid and alkali corrosion resistance, salt spray moisture resistance.

Modular Installation

The modular structure design, top cover, side panel, DIN-rail, mounting plate, waterproof connector, fan, and microswitch are all detachable.

Heat Dissipation

The fan on the top and the cable and ventilation holes on the bottom form a bottom-up air duct to help heat dissipation.

Microswitch for Flexible Application

The door microswitch can be connected to the power supply, to the cloud alarm via I/O, or to the buzzer alarm.

Specifications



Products	WI-IOTBOXMINI
Hardware Version	V1
Hardware Features	
Overall Dimensions (W*H*D)	300*300*206.5mm
Inner Dimensions (W*H*D)	250*250*180mm
Weight(kg)	5.5
Package Dimensions (W*H*D)	360*360*230mm
Package Weight(kg)	7.7
Thickness	1.2mm
Materia	SUS430 Stainless Steel
Color	Light Grey + Grey
Surface Treatment	Electrostatic Spraying
Installation	Pole/Wall/Floor mounted
Door	1
Lock Hole	1
Detachable Side Plate	2 (1 on each side panel)
M25 Waterproof Connector	2 (1 on each side inner panel)
Aluminum Alloy Chute	2 (on the rear panel)
Bottom Cable Entry	1 (at the bottom)
Air Intake Holes/Water Outlet Holes	4 (at the bottom, with rubber plugs)
Microswitch	1 (on the upper right inside)
Fan	1 (on the top inner panel)
Protectio	IP65, Ik10
Application	
Application	Junction, Distribution, Electrical, Battery, Control, Monitoring etc. Outdoor waterproof Enclosure Box

Accessory Specifications

Products	
Fan	
Input Voltage	12V DC (7~13.2V DC)
Input Current	0.24A
Power consumption	<3.36W
Speed	3800 R.P.M ± 10%
Air Flow	112.77 m3/h @Zero Static Pressure
Acoustical Noise	43dB-A (MAX. 46dB-A)
Dimensions	92*92*25.4mm ±0.5mm
Operation temperature	-10°C ~70°C
Miniature Circuit Breaker	
Number of Poles	2P
Rated Current	25A
Rated Voltage	415V
Thermal Magnetic Release	C
Mechanical Life	20000 cycles
Electrical Life	6000 cycles
Short-circuit Breaking Capacity(Icn)	6000A
Dimensions(W*H*D)	35.6*84.2*74mm
Installation	DIN-rail mounted
Microswitch	
Model	Omron V156-1C25
PIN	NC, NO, COM; NC and COM have connected cables.
Rated Current	15A
Rated Voltage	250V
Mechanical Life	15,000,000 cycles

Products

Thermostat (Optional)

Function	<p>Red Thermostat: normally close, disconnect the circuit when the set temperature is reached, usually used for heating.</p> <p>Blue Thermostat: normally open, connect the circuit when the set temperature is reached, usually used for fans.</p>
Setting Temperature Range	0~60°C
Switch Temperature Difference	7K (±4K tolerance)
Service Life	100000 cycles
Max capacity	250V AC, 10(2)A; 120V AC, 15(2)A; DC 30W
Connection	2-pole, 2.5mm ² max. wire
Dimensions (W*H*D)	36*81*77.8mm
Weight	40g
Installation	DIN-rail mounted
Operation Temperature	-20°C ~80°C


Heater (Optional)

Heater Capacity (Typical)	45W
Input Voltage	<p>120V~240V AC/DC (110V min. 265V max.)</p> <p>*The heating performance will be reduced by 10% when operating voltage is lower than 140V.</p>
Input Current	3A max.
Heating Element	PTC resistor
Material	Aluminum
Connector	3*press clamps, fit 0.5~1.5mm ² standard wire and 0.5~2.5mm ² rigid wire
Dimensions	70*110*57mm
Weight	0.22kg
Installation	DIN-rail mounted
Operation temperature	-45°C ~70°C


Appearances and Dimensions

WI-IOTBOX01


Front Overview

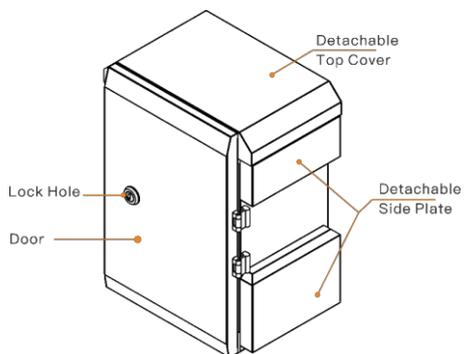


Rear Overview

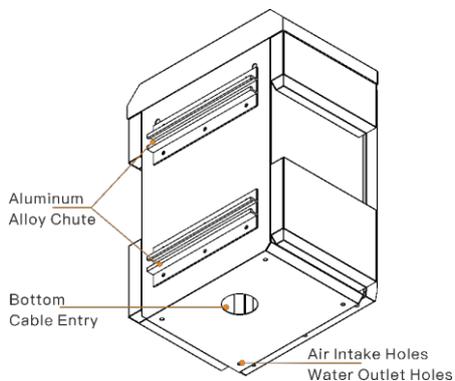


Inner Overview

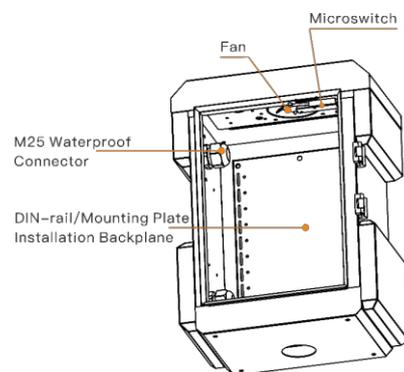


Front

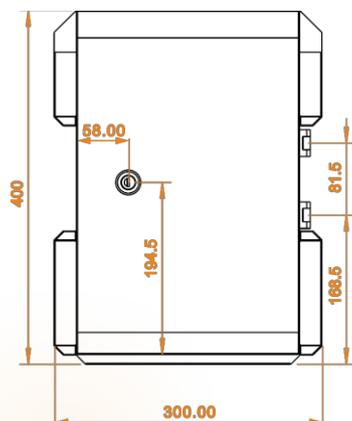


Inner Front

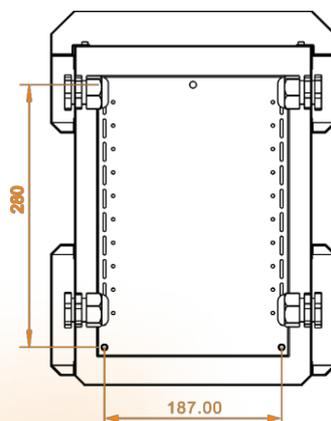


Rear

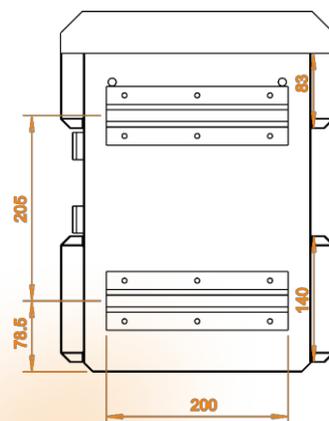


Left Side

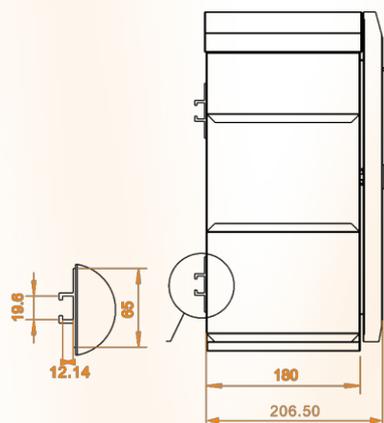


Right Side

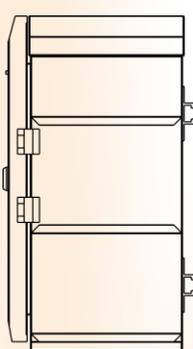


Inner Side

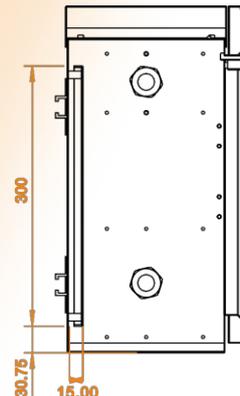

Bottom

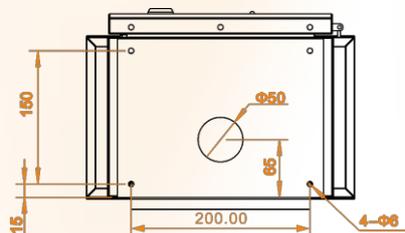

Inner Top

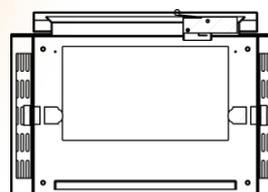

Package Contents

Welcome to order our products. After purchasing, you will receive:

Items	WI-IOTBOXMINI
BOX	1 pcs
Quick Installation Guide	1 pcs
Waterproof Connector	2 pcs
Key	2 pcs
Microswitch	1 pcs
Miniature Circuit Breaker	1 pcs
Grounding Connector	1 pcs
DIN-rail	1 pcs
Wall Mounting Accessories	2*Hanging Pieces (Small), 2*Hanging Pieces (Large), 4*Expansion screws, 4*Hex screws
Pole Mounting Accessories	2*1.2m Stainless Steel Cable Ties (50–350mm in diameter), 2*Stainless Steel Universal Clips
Mounting Plate	N/A
Option Accessory	
Thermostat	Switches of fans or other devices according to the temperature.
Heater	Heat the inside of the BOX to keep the device working at a proper temperature and humidity



Wireless-Tek Technology Limited

Address: Building 3, Units 1801–1807, 1812, Huaqiang Era Plaza, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, China.

Website: www.wireless-tek.com

Tel: 86-0755-32811290

Email: sales@wireless-tek.com

Technical Support: tech@wireless-tek.com



Technical Support



Cloud Management



Company Website