



AX900 High Gain Wi-Fi 6 Bluetooth USB Adapter

Model: MA60XHB


// Highlights

- 600 Mbps (5 GHz) + 287 Mbps (2.4 GHz) Dual Band Wi-Fi†
- Reliable Bluetooth 5.3
- High Performance Antenna
- Pre-Loaded Internal Driver




// Boost Wireless Range with High Gain Antenna

A high gain antenna reaches your router from farther with more precise directional range, sustaining faster and more stable wireless connections.

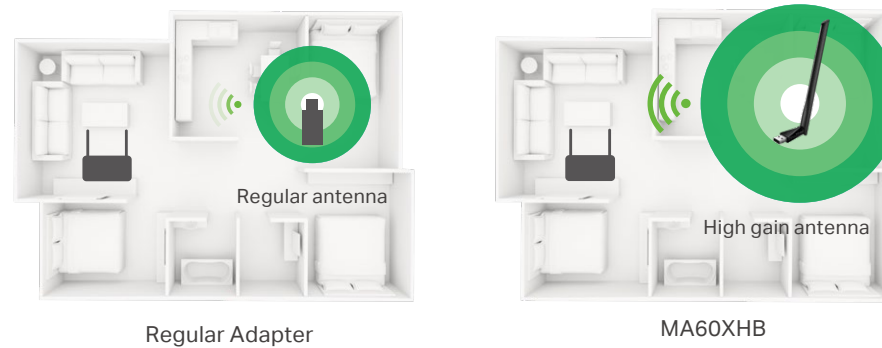

// Faster and Further Bluetooth 5.3

MA60XHB makes your PC Bluetooth-capable with ultra-fast Bluetooth 5.3 which achieves more stable connection, farther range and faster transmission speeds.*

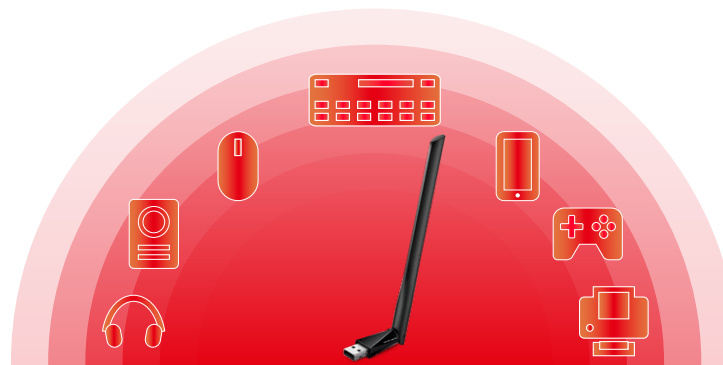

// Specifications

Wireless Specifications

Wi-Fi Speed	Wi-Fi Standards	Frequency	Wireless Security
5 GHz: Up to 600Mbps 2.4 GHz: Up to 287Mbps	IEEE 802.11 a/b/g/n/ac/ax	2.4 GHz, 5 GHz	WEP, WPA/WPA2/WPA3, WPA-PSK/WPA2-PSK†

Physical Specifications

Interface	Dimensions (W x D x H)	Antenna
USB 2.0	57.8 × 16.8 × 173.4 mm (2.28 × 0.66 × 6.83 inches)	1 × External High Performance Antenna

Others

System Requirements

Windows 11/10

Environment

Operating Temperature: 0°C~40°C (32°F ~104°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing

Package Contents

AX900 High Gain Wi-Fi 6 Bluetooth USB Adapter (MA60XHB)

Quick Installation Guide

For more information, please visit www.mercusys.com.

Specifications are subject to change without notice. MERCUSYS is a registered trademark of MERCUSYS TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2026 MERCUSYS TECHNOLOGIES CO., LTD. All rights reserved.

†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, AP limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and AP location.

§Functionality may be restricted on some operating systems and platforms. To ensure compatibility, you may need to update the adapter's drivers after an OS update. You can find our latest drivers in the download center at <http://www.mercusys.com>

ΔUse of Wi-Fi 6 (802.11ax), and features including MU-MIMO require APs to also support the corresponding features.

*Several new features are introduced in the Bluetooth Core Specification 5.0 and 5.3 Release, including 2x faster speed and 4x broader coverage compared with Bluetooth 4.2.