


## DS-PK670W Touchscreen Keypad

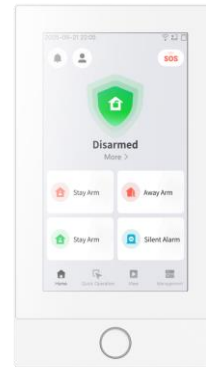


- 7-inch LCD touch screen with intuitive interface for clear display and easy system control.
- Supports LAN, Wi-Fi, and bus connectivity for flexible installation.
- Supports live camera preview via Wi-Fi or LAN.
- Supports event review with verification video storage with TF card.
- Shortcut keys for quick operation and flexible relay or area control.

## ▪ Specification

<b>Event logs</b>	
Event log records	200
<b>User interface</b>	
Display	7" Colorful LCD with resolution 600*1024
Indication	1 indicator(Yellow\Green\Red)
Key button	1
<b>Authentication</b>	
PIN	4~6 digits
<b>Bus interconnection</b>	
Bus technology	Half-Duplex RS-485
Bus wiring	4-Core Alarm Cable (at least 2x0.5mm <sup>2</sup> +2x0.22mm <sup>2</sup> )
<b>Communication interfaces</b>	
LAN/Ethernet	Supported,10/100 Mbps self-adaptive
Wi-Fi	Supported,802.11b/g/n (2.4GHz)
<b>Power supply - general</b>	
Quiescent current	270mA@12VDC
Input voltage	12 VDC nominal (9~24 VDC),powered by bus
Max. current	400mA@12VDC
<b>Relay output</b>	
Relay output	NA
<b>Environmental</b>	
Operating temperature	-10°C to 50°C
Storage temperature	-10°C to 50°C
Relative humidity	10%-90% non-condensing
<b>Physical</b>	
Dimension (W × H × D)	122mmx218.7mmx27mm
Weight	400g
Installation method	Wall mounting
Tamper-proof	Front and Rear
<b>Compliance</b>	
Electrical conformity	CE,CB
EN 50131	Security Grade 2,Environmental Class II
<b>Indication</b>	
LED indication	Supported
<b>Hardware features</b>	
SD card	FAT32 up to 128G
Loudspeaker	Supported
Mic	Reserved
Debug port	2
<b>General</b>	
Application scenario	Indoor
Shell material	Plastic
Color	White or Black

▪ Dimension

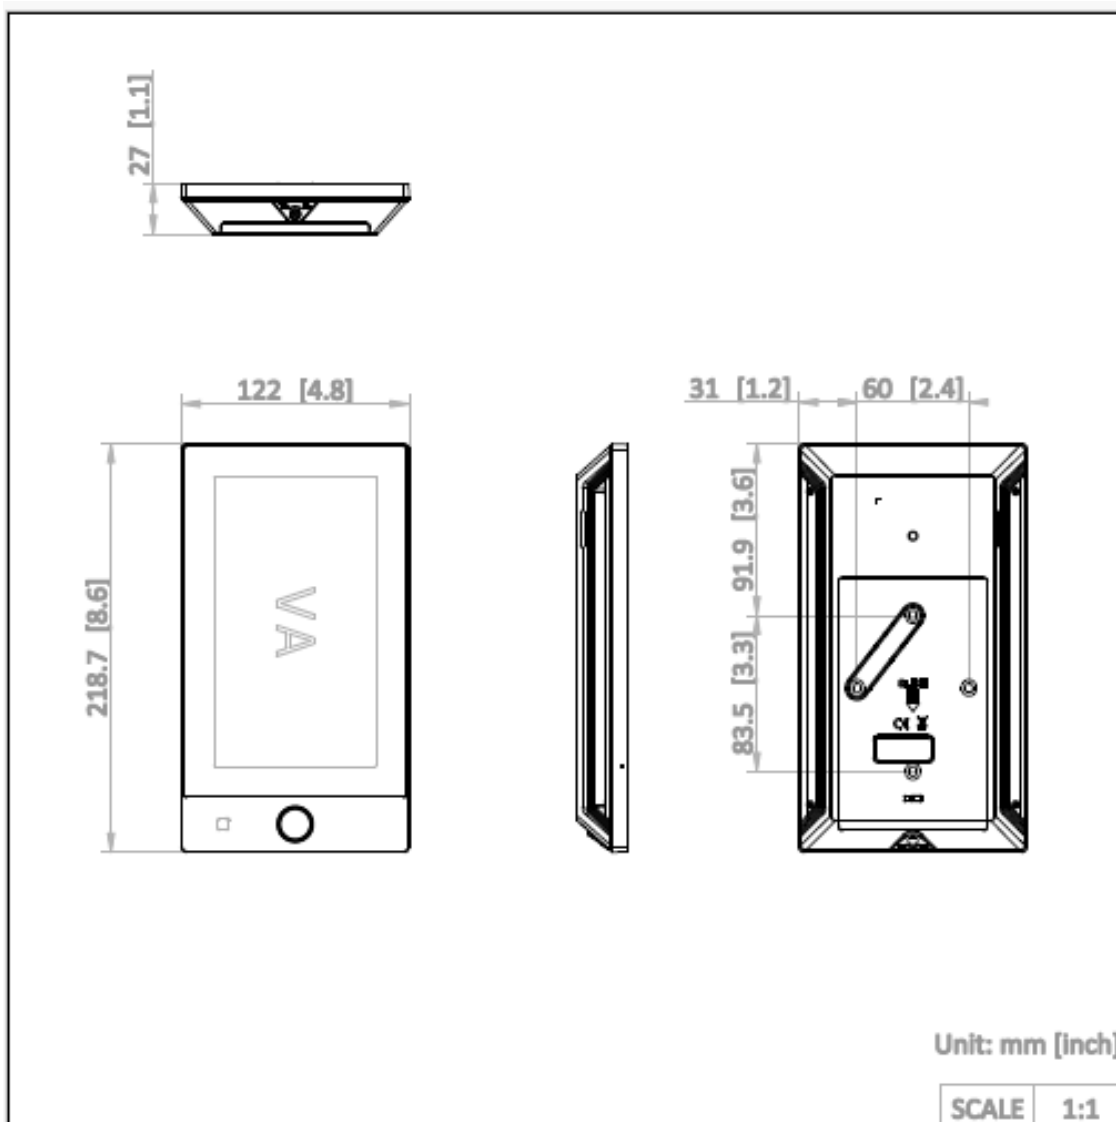

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

